



# GFX International Series

Sealed True Sinewave Inverter/Charger

- **Grid-Interactive, Backup or Standalone Power**
- **Sinewave Output**
- **Intelligent Battery Charging with Generator Support**
- **High Surge and Charger Ratings**
- **Sealed Chassis For Harsh Environments**
- **Field Serviceable**
- **Standard 5-Year Warranty**



The OutBack true sinewave GFX International Series Inverter/Charger is a competitive power solution designed for applications with lower power demands. Incorporating a DC-to-AC sinewave inverter, battery charger and AC transfer relay housed within a die-cast aluminum chassis, the International Series GFX Inverter/Chargers give you the ability to sell solar, wind or hydro power back to the utility grid while providing instantaneous back-up power in the event of a utility outage.

The GFX International Series built in transfer relay automatically disconnects your loads from the utility grid and powers them from the inverter in the event of an outage, allowing you to continue using your solar and battery back-up power, unlike traditional grid-tie systems. For areas that frequently experience power instability such as surges, spikes or brownouts, or where standard inverters have trouble syncing to the utility grid, the GFX International Series grid reconnect timers have been set to reduce overall sell-back downtime and improve system functionality.

Intelligent multi-stage battery charging prolongs the life of your batteries and built-in networked communications allow for simultaneous communications of up to ten OutBack Power components within the system. The exclusive modular system architecture means that increased power output is just an additional inverter/charger away. Our GFX International Series uses a sealed chassis that can operate in the harshest environmental conditions such as high humidity and corrosive salt air.

OutBack Power inverter/chargers are the only choice when you need a true-sinewave, powerful, modular and reliable power solution for your home, business or extreme application.

**OutBack**  
**POWER™**

[www.outbackpower.com](http://www.outbackpower.com)


# GFX International Series Specifications

230Vac 50Hz Sealed Models				120Vac 60Hz Sealed Models		
	GFX1312E	GFX1424E	GFX1448E	GFX1312	GFX1424	GFX1548
<b>Nominal DC Input Voltage</b>	12 Vdc	24 Vdc	48 Vdc	12 Vdc	24 Vdc	48 Vdc
<b>Continuous Power Rating at 25°C (77°F)</b>	1300 VA	1400 VA	1400 VA	1300 VA	1400 VA	1500 VA
<b>AC Voltage/Frequency</b>	230 Vac / 50 Hz	230 Vac / 50 Hz	230 Vac / 50 Hz	120 Vac / 60 Hz	120 Vac / 60 Hz	120 Vac / 60 Hz
<b>Continuous AC RMS Output at 25°C (77°F)</b>	5.65 Aac	6.09 Aac	6.09 Aac	10.83 Aac	11.66 Aac	12.5 Aac
<b>Idle Power</b>	<b>Full</b>	~ 18 Watts	~ 18 Watts	~ 18 Watts	~ 18 Watts	~ 18 Watts
	<b>Search</b>	~ 6 Watts	~ 6 Watts	~ 6 Watts	~ 6 Watts	~ 6 Watts
<b>Typical Efficiency</b>	90%	92%	93%	90%	92%	93%
<b>Total Harmonic Distortion</b>	<b>Typical</b>	2%	2%	2%	2%	2%
	<b>Maximum</b>	5%	5%	5%	5%	5%
<b>Output Voltage Regulation</b>	± 2%	± 2%	± 2%	± 2%	± 2%	± 2%
<b>Maximum Output Current</b>	<b>Peak (1 ms)</b>	28 Aac	28 Aac	28 Aac	56 Aac	56 Aac
	<b>RMS (100 ms)</b>	20 Aac	20 Aac	20 Aac	40 Aac	40 Aac
<b>AC Overload Capability</b>	<b>Surge (100ms)</b>	4600 VA	4600 VA	4600 VA	4600 VA	4600 VA
	<b>5 Seconds</b>	2900 VA	2900 VA	2900 VA	2900 VA	2900 VA
	<b>30 Minutes</b>	1800 VA	2000 VA	2000 VA	1800 VA	2000 VA
<b>AC Input Current Maximum</b>	30 Aac	30 Aac	30 Aac	60 Aac	60 Aac	60 Aac
<b>AC Input Voltage Range (Adjustable)</b>	140 to 280 Vac	140 to 280 Vac	140 to 280 Vac	70 to 140 Vac	70 to 140 Vac	70 to 140 Vac
<b>AC Input Frequency Range</b>	45 to 55 Hz	45 to 55 Hz	45 to 55 Hz	54 to 66 Hz	54 to 66 Hz	54 to 66 Hz
<b>DC Input Voltage Range</b>	10.5 to 17.0 Vdc	21.0 to 34.0 Vdc	42.0 to 68.0 Vdc	10.5 to 17 Vdc	21.0 to 34.0 Vdc	42.0 to 68.0 Vdc
<b>Continuous Battery Charger Output</b>	70 Adc	40 Adc	20 Adc	70 Adc	40 Adc	20 Adc
<b>Max DC Current at Rated Power</b>	130 Adc	70 Adc	35 Adc	130 Adc	70 Adc	37.5 Adc
<b>Warranty</b>	Standard 5 year Warranty			Standard 5 year Warranty		
<b>Weight (kg/lbs)</b>	<b>Unit</b>	22.5 / 49.6			22.5 / 49.6	
	<b>Shipping</b>	25.6 / 56.4			25.6 / 56.4	
<b>Dimensions H x W x L (cm/in)</b>	<b>Unit</b>	33 x 21 x 41 / 13 x 8.25 x 16.25			33 x 21 x 41 / 13 x 8.25 x 16.25	
	<b>Shipping</b>	55 x 33 x 56 / 21.75 x 13 x 22			55 x 33 x 56 / 21.75 x 13 x 22	

Specifications subject to change without notice

Note: This product is not ETL listed to UL1741. Not intended for use in the USA or Canada.

**Available From:**

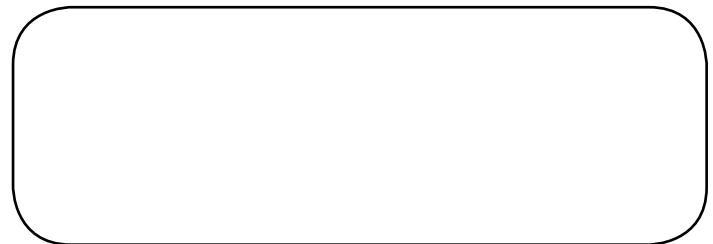

**Corporate Office:**  
5917 195th St. NE  
Arlington, WA 98223 USA  
Phone: (360) 435.6030  
Fax: (360) 435.6019

**European Office:**  
Hansastrasses 8  
D-91126  
Schwabach, Germany  
Phone: +49. 9133.79889.0  
Fax: +49.9122.79889.21

**Asia Office:**  
Suite 1903, 19/F., Tower 1  
33 Canton Road, Tsun Sha Tsui  
China Hong Kong City, Kowloon  
Hong Kong  
Phone: +852.2736.8663  
Fax: +852.2199.7988

**Latin American Office:**  
15105 Cedar Bluff Pl.  
Wellington, FL 33414 USA  
Phone: (561) 792.9651  
Fax: (561) 792.7157